



Paneltec
INDUSTRIES



vitrabond[®]

ALUMINIUM COMPOSITE PANEL / MANUFACTURED BY FAIRVIEW



vitrabond®

ALUMINIUM COMPOSITE PANEL / MANUFACTURED BY FAIRVIEW

ABOUT VITRABOND

Vitrabond Aluminium Composite Panel (ACP), is Paneltec's highly versatile façade cladding panel, offering excellent durability and extreme weather resistance. It is ideal for façades, fascia, soffits, awnings and many more applications such as standing seam cladding and balustrades.

The 4mm thick composite panel is comprised of a fire rated core, sandwiched between either two aluminium or other natural metal cover sheets. This results in an outstanding surface flatness and high workability, coupled with an excellent strength to weight ratio.

Vitrabond can be easily and accurately installed by being fabricated into pre-made cassettes and then secret-fixed to a top hat sub-structure or packers with hidden mechanical fittings.

Vitrabond requires minimal maintenance and has an up to 20 year warranty when installed by a licensed installer. With a long track record of consistency, reliability and quality, in addition to our large stock levels, unlimited colour range and continual product development; Vitrabond is well-equipped to meet the requirements for every project.

KEY FEATURES



FIRE RATED

Vitrabond has been tested to the NFPA 285 test and has passed. Vitrabond has also been tested to the very extensive AS5113 test.



CONCEALED FIX SYSTEM

Vitrabond can be installed by routing and folding panels into the concealed fix z-angle cassette system.



COST EFFECTIVE

Vitrabond has enjoyed consistent growth not only due to the desire for a clean and modern look, but also as a product offering rapid cost effective installation.



PAINT SYSTEM

Vitrabond only uses the highly recognised PVDF KYNAR 500 or FEVE paints known for their durability, providing the optimum weather and UV resistance.



WEATHERPROOFED

Vitrabond is weatherproofed to E2 requirements and tested according to AS/NZS 4284 and passed to a high level.



CODEMARK

Vitrabond is CodeMark certified to comply with the building code of New Zealand ensuring that you are specifying a quality assured product.



WARRANTY

Vitrabond has a long track record of consistency, reliability and quality allowing us to offer up to a 20 year warranty when installed by a licensed installer.



LOW MAINTENANCE

The Vitrabond finish has undergone 40+ years of exposure testing which is continuing to confirm the superior durability and low maintenance of fluoropolymer coatings.

GEORGE WINDSOR APARTMENTS, VIC



MONASH UNIVERSITY GREEN CHEMICAL FUTURES, VIC





vitrabond®

ALUMINIUM COMPOSITE PANEL / MANUFACTURED BY FAIRVIEW

FIRE RESISTANCE

In today's architecture, it is the technical details, as well as the appearance that count; such as sustainability, thermal insulation, and fire protection.

Vitrabond FR has a fire rated core and is CodeMark certified to the New Zealand Building code also BCA and Australian Standards. The core contains a high percentage of non-combustible mineral leading to a high level of fire resistance. The panel does not contribute to the spread of flame and has minimal smoke development.

VITRABOND			
TEST STANDARD	RESULT		
AS1530.3	PASS	Ignitability Index	0
	PASS	Heat Evolved	0
	PASS	Spread of Flame	0
	PASS	Smoke Developed	0-1
ASTM E 84	Class 1 or A	Flame Spread Index	10
		Smoke Development	20
ISO 9705	Group 2		
NFPA 285	PASS		

WEATHERPROOFING

Vitrabond is a faced system that can provide a primary seal for the purpose of weatherproofing. Vitrabond has been tested to strenuous AS/NZS 4284 test and has passed.

This means that, where compliant, Vitrabond can be used as the primary sealing layer therefore minimising wall build up and maximising efficiencies. It is highly recommended that fixings be made in accordance with Paneltec's instructions and procedures to ensure that the surface is watertight and able to resist thermal or wind movements of the façade.

THE STRAND COOLONGATTA, QLD





vitrabond®

ALUMINIUM COMPOSITE PANEL / MANUFACTURED BY FAIRVIEW

MANUFACTURING QUALITY

A dedication to the total fulfillment of our client's and customer's expectations is reflected by a complete quality control system, beginning at the point of specification and continuing through to delivery of the guaranteed products. All activities are carried out in a manner which:

- Uses the framework of ISO9000 Quality Standards to verify the quality of our systems
- Ensures that our products and services are of the highest standards
- Create continuous improvements to our product through the application of the best quality practices.

ACCEPTANCE VARIATION

WIDTH	±2.0 mm
LENGTH	±4.0 mm
THICKNESS	±2% for 3 mm & 4 mm; 3% for 6 mm
BOW MAXIMUM	0.5% of the length and/or width
SQUARENESS MAXIMUM	5.0 mm
SURFACE DEFECTS	The surface shall not have any irregularities such as dents, scratches and other imperfections in accordance with our quality assurance

WARRANTY

A warranty of up to 20 years is offered, when installed by a licensed installer.




vitrabond®

ALUMINIUM COMPOSITE PANEL / MANUFACTURED BY FAIRVIEW

TYPICAL COMPOSITION

1. Peel-off Protective Film
2. Clear/Nano Coating
3. PVDF Coloured Coating
4. Primer Coating
5. 0.5mm Aluminium Skin
6. 3mm FR Core
7. 0.5mm Aluminium Skin
8. Polyester Anti-corrosion Coating

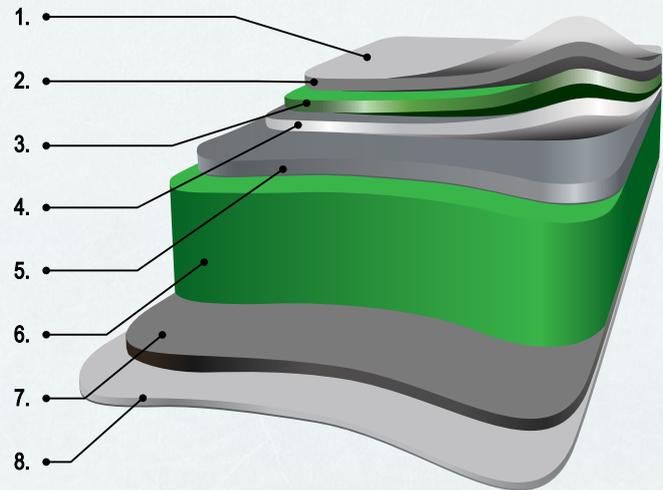

DIMENSIONS

WIDTH	LENGTH	THICKNESS
1250	2500	4mm
	3200	
	4000	
1570	2500	
	3200	
	4000	
CUSTOM SIZES ARE AVAILABLE, PLEASE SPEAK TO THE PANELTEC TEAM		

WEIGHT

THICKNESS	WEIGHT (KG/M ²)
4mm	7.3



vitrabond[®]

ALUMINIUM COMPOSITE PANEL / MANUFACTURED BY FAIRVIEW

TECHNICAL DATA

CLASSIFICATION	TEST STANDARD	UNIT	VITRABOND
PANEL WEIGHT		[kg/m ²]	4.4
THICKNESS		[mm]	4
THICKNESS OF ALUMINIUM FACE		[mm]	0.5
MAXIMUM WIDTH		[mm]	2000
ALUMINIUM SKIN			
TENSILE STRENGTH			160MPa
ALLOY/TEMPER OF ALUMINIUM LAYERS			3003 H24
SURFACE PROPERTIES (PVDF COATINGS)			
DRY FILM THICKNESS (NOMINAL)	ASTM D1400		0.20-0.30 mil primer 0.70-0.80 mil topcoat
GLOSS	ASTM D523		Standard @ 60°: 25-35 Duranar LG @ 85°: <10
PENCIL HARDNESS	ASTM D3363		F-2H
FLEXIBILITY	T-Bend, ASTM D4145		0-2 T-Bend; No pick-off
ADHESION	ASTM D3359 Reverse Impact 1/16" crosshatch		No adhesion loss
REVERSE IMPACT	ASTM D2794		1.5 x Metal thickness (aluminium): No cracking or adhesion loss
ACID RESISTANCE	ASTM D1308		10% Muriatic acid - 24 hrs: No effect
ACID RAIN TEST	Kesternich SO ₂ , DIN 50018		15 Cycles min. No objectionable colour change
ALKALI RESISTANCE	ASTM D1308 10%, 25%, NaOH, 1 hr.		No effect
SALT SPRAY RESISTANCE	ASTM B117 5% salt fog @ 95°F		Passes 4000 hrs. Less than 1/1" avg. creepage from scribe; None or few #8 blisters
HUMIDITY RESISTANCE	ASTM D714 ASTM D2247 100% relative humidity @ 95°F		Passes 4000 hrs. No #8 blisters
EXTERIOR EXPOSURE	ASTM D2244 ASTM D4214 10 yrs. @ 45°, South Florida		Max. 5 fade Max. 8 chalk





vitrabond®

ALUMINIUM COMPOSITE PANEL / MANUFACTURED BY FAIRVIEW


FINISH

Vitrabond uses only the highly recognised PVDF KYNAR 500 or FEVE paints known for their high durability. These premium paints provide an optimum resistance to weather and industrial pollution. More than 40 years of South Florida Exposure Testing is continuing to confirm the superior chemical and physical properties of fluoro polymer coatings.

Vitrabond has an unlimited colour range. We are able to match almost any finish and colour required.

Vitrabond panels also come in a range of anodised finishes, offering both standard and customised colours and textures as well as natural zinc, stainless steel, copper and other natural metal finishes. It can also be used with our custom graphic cladding solution, VitraART, to create a truly individual façade that comes with a 10 year exterior warranty.

FIXING SYSTEM

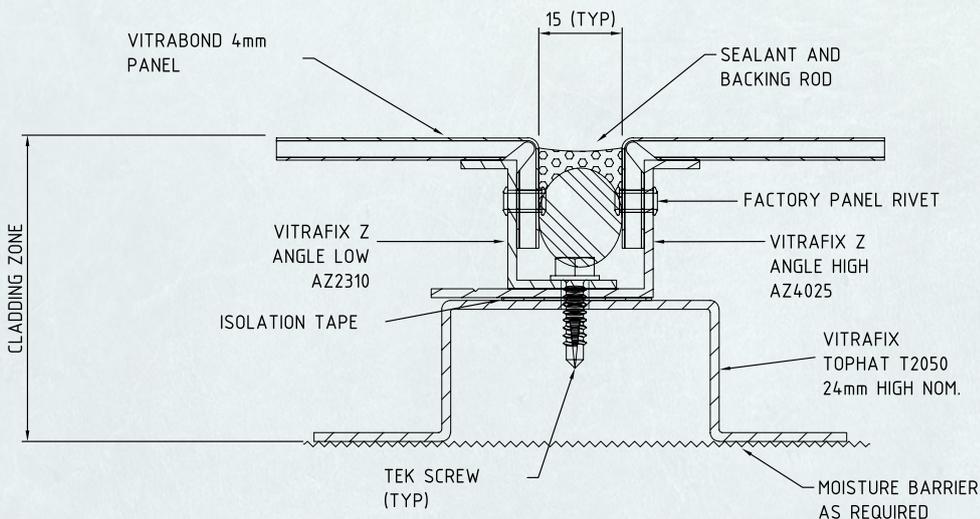

Concept drawing only. For more details, please refer to the Paneltec Installation Manual

CARRARA GARDENS, QLD



MERRIFIELD DISPLAY CENTRE, VIC





FAIRVIEW™

DEFINING ARCHITECTURE SINCE 1963



Paneltec
INDUSTRIES

NEW ZEALAND | AUSTRALIA | UNITED KINGDOM
SALES INQUIRES 0508 726 358 SALES@PANELTEC.CO.NZ

WWW.PANELTEC.CO.NZ

